(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 18 August 2005 (18.08.2005)

PCT

(10) International Publication Number WO 2005/075118 A1

(51) International Patent Classification⁷: 1/00, G02F 1/13, 1/1345, H01L 21/60

B08B 7/04,

(21) International Application Number:

PCT/JP2005/002189

(22) International Filing Date: 8 February 2005 (08.02.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:


- (71) Applicant (for all designated States except US): SHARP KABUSHIKI KAISHA [JP/JP]; 22-22, Nagaike-cho, Abeno-ku, Osaka-shi, Osaka 5458522 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): NAGATA, Katsunori [JP/JP]; 1023-7, Shin-machi, Yamatokoriyama-shi,

Nara 6391054 (JP). **ARIMOTO, Masaya** [JP/JP]; 745-6, Ichinomoto-cho, Tenri-shi, Nara 6320004 (JP).

- (74) Agents: GORO, Kazuo et al.; AKATSUKI UNION PATENT FIRM, Midori Nagoya Bldg. 8th Floor, 22-4, Meieki 3-chome, Nakamura-ku, Nagoya-shi, Aichi 4500002 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: CLEANING DEVICE OF BOARD AND CLEANING METHOD, FLAT DISPLAY PANEL, MOUNTING EQUIPMENT OF ELECTRONIC PARTS AND MOUNTING METHOD

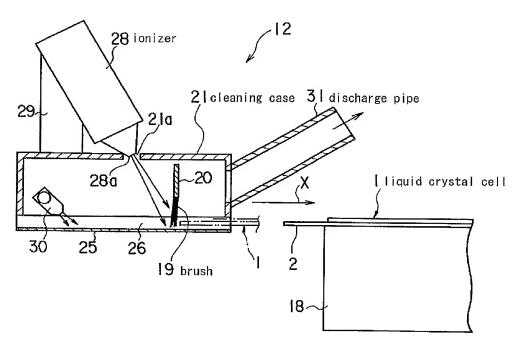

(57) Abstract: Mounting equipment comprises a brush (19) which brushes an edge portion of a liquid crystal cell (1) and removes the contaminating dust attached to this edge portion, an ionizer (28) for injecting an ionized gas toward a portion to contact at least the edge portion of the liquid crystal cell (1) of this brush (19), and a discharge pipe (31) provided within a cleaning case (21) for absorbing and removing the gas injected toward the brush (19) from this ionizer (28).

WO 2005/075118 A1

FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

with international search report